

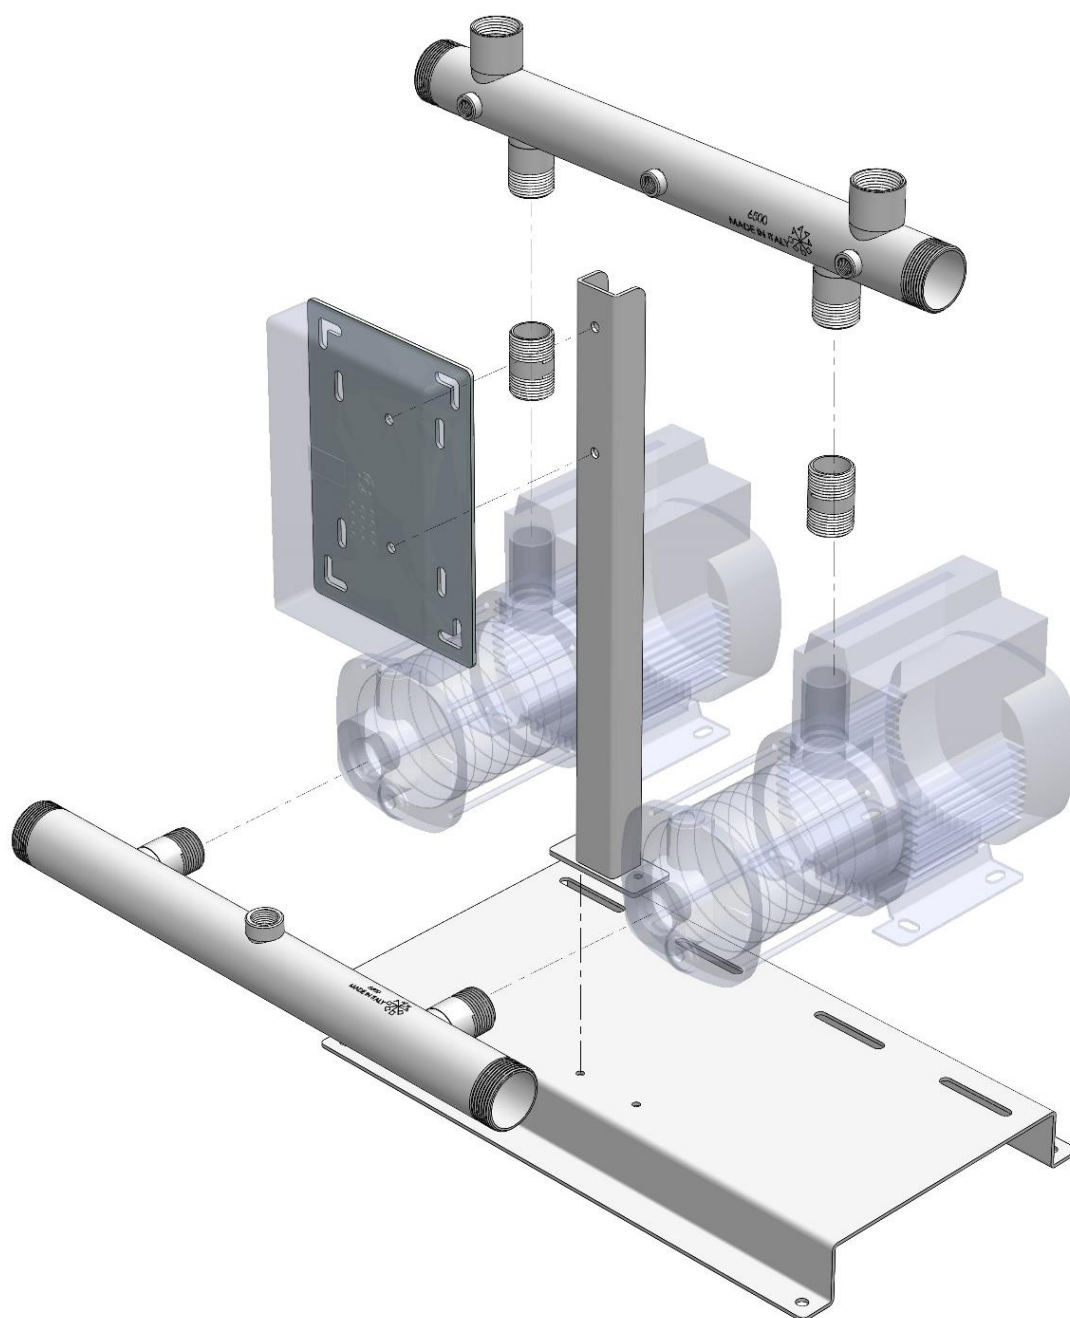


**CATALOGUE 2018**  
**MANIFOLDS FOR PUMPS SYSTEMS**  
**INOX 304L (1.4306)**

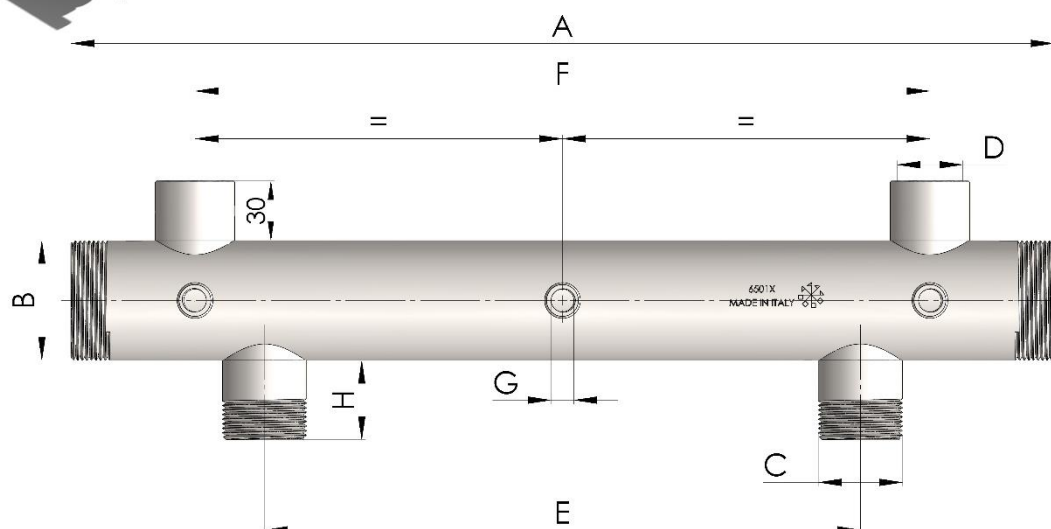

## DELIVERY SIDE MANIFOLDS FOR 2 PUMPS INOX304

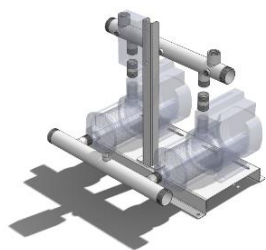



code	A (mm)	B (Ø)	C (G)	D (G)	E (mm)	F (mm)	G (G)	H (mm)	Weight (kg)
<b>6500X</b>	500	1"1/2	1"	1"	300	370	1/4"	40	1.90
<b>6503X</b>	500	2"	1"	1"	300	370	1/4"	40	2.30
<b>6501X</b>	500	2"	1"1/4	1"	300	370	1/4"	40	2.40
<b>6510X</b>	700	2"	1"1/4	1"	360	370	1/4"	40	3.20
<b>6505X</b>	500	2"	1"1/2	1"	300	370	1/4"	40	2.40
<b>6511X</b>	700	2"	1"1/2	1"	360	390	1/4"	40	3.20
<b>6502X</b>	500	2"1/2	1"1/4	1"	300	370	1/4"	40	2.90
<b>6513X</b>	700	2"1/2	1"1/4	1"	360	390	1/4"	40	4.00
<b>6506X</b>	500	2"1/2	1"1/2	1"	300	370	1/4"	60	3.00
<b>6512X</b>	700	2"1/2	1"1/2	1"	360	390	1/4"	60	4.20
<b>6504X</b>	700	3"	2"	1"	360	390	1/4"	60	4.90
<b>6514X</b>	700	DN100	3"	1"	360	390	1/4"	60	15.20

<b>A</b>	Length of manifold in mm
<b>B</b>	Dimension of main pipe, male threaded both sides.
<b>C</b>	Pumps' connection, male threaded.
<b>D</b>	Pressure vassels' connection, female sleeve.
<b>E</b>	Distance between pumps.
<b>F</b>	Distance between pressure vassels.
<b>G</b>	Female sleeves for instruments.

<b>MATERIAL</b>	Tube inox 304L
<b>TUBE THICKNESS</b>	3mm
<b>THREADS</b>	UNI EN ISO 228-1 cylindrical (DIN2999, BSPP)
<b>SURFACE TREATMENT</b>	Electrochemical polishing DIN 8590

The information in this catalog may be modify by the company, request confirmation at the time of the order.  
On request may be provided certificates of raw material, welding and test certification, ISO certification.

## SUCTION SIDE MANIFOLDS FOR 2 PUMPS INOX304

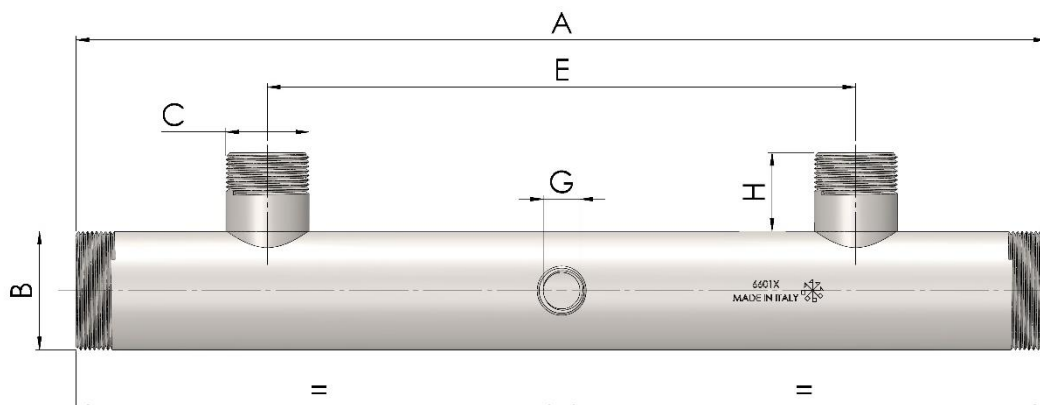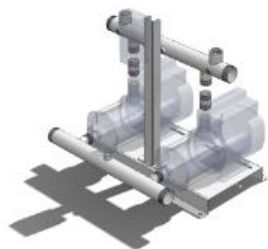



code	A (mm)	B ( $\varnothing$ )	C (G)	E (mm)	G (G)	H (mm)	Weight (kg)
<b>6600X</b>	500	1"1/2	1"	300	1/2"	40	1.80
<b>6603X</b>	500	2"	1"	300	1/2"	40	2.10
<b>6601X</b>	500	2"	1"1/4	300	1/2"	40	2.20
<b>6605X</b>	500	2"	1"1/2	300	1/2"	40	2.30
<b>6611X</b>	700	2"	1"1/2	360	1/2"	40	3.10
<b>6609X</b>	500	2"1/2	1"1/4	300	1/2"	40	2.80
<b>6613X</b>	700	2"1/2	1"1/4	360	1/2"	40	3.90
<b>6602X</b>	500	2"1/2	1"1/2	300	1/2"	40	2.80
<b>6612X</b>	700	2"1/2	1"1/2	360	1/2"	40	3.90
<b>6604X</b>	500	3"	2"	300	1/2"	60	3.40
<b>6610X</b>	700	3"	2"	360	1/2"	60	5.00
<b>6614X</b>	700	DN100	3"	360	1/2"	60	15.10

<b>A</b>	Length of manifold in mm
<b>B</b>	Dimension of main pipe, male threaded both sides.
<b>C</b>	Pumps' connection, male threaded.
<b>E</b>	Distance between pumps.
<b>G</b>	Female sleeves for instruments.

MATERIAL	Tube inox 304L
TUBE THICKNESS	3mm
THREADS	UNI EN ISO 228-1 cylindrical (DIN2999, BSPP)
SURFACE TREATMENT	Electrochemical polishing DIN 8590

The information in this catalog may be modify by the company, request confirmation at the time of the order.  
On request may be provided certificates of raw material, welding and test certification, ISO certification.

## DELIVERY SIDE MANIFOLDS FOR 3 PUMPS INOX304

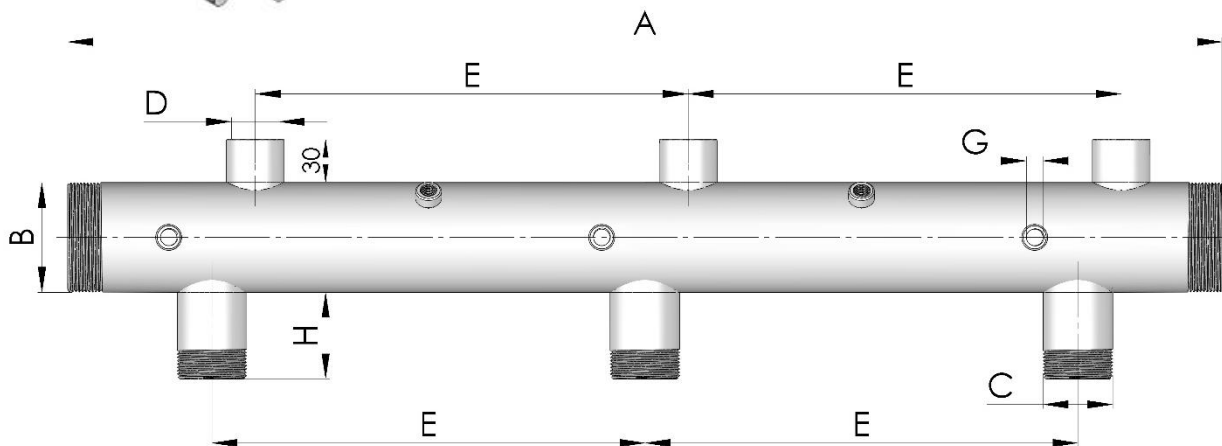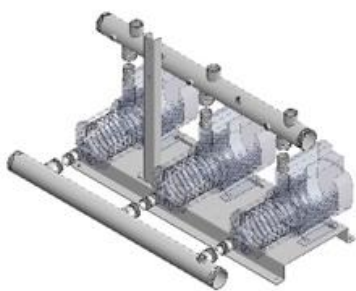



code	A (mm)	B ( $\varnothing$ )	C (G)	D (G)	E (mm)	F (G)	H (mm)	Weight (kg)
<b>6542X</b>	800	2"	1"	1"	300	1/4"	40	4.00
<b>6540X</b>	800	2"	1"1/4	1"	300	1/4"	40	4.30
<b>6543X</b>	800	2"1/2	1"1/4	1"	300	1/4"	40	4.80
<b>6541X</b>	800	2"1/2	1"1/2	1"	300	1/4"	60	5.00
<b>6544X</b>	800	3"	2"	1"	300	1/4"	60	6.20
<b>6545X</b>	800	DN100	3"	1"	300	1/4"	90	13.00

<b>A</b>	Length of manifold in mm
<b>B</b>	Dimension of main pipe, male threaded both sides.
<b>C</b>	Distance between pumps.
<b>D</b>	Pumps' connection, male threaded.
<b>E</b>	Pressure vassels' connection, female sleeve.
<b>F</b>	Female sleeves for instruments.

MATERIAL	Tube inox 304L
TUBE THICKNESS	3mm
THREADS	UNI EN ISO 228-1 cylindrical (DIN2999, BSPP)
SURFACE TREATMENT	Electrochemical polishing DIN 8590

The information in this catalog may be modify by the company, request confirmation at the time of the order.  
On request may be provided certificates of raw material, welding and test certification, ISO certification.

## SUCTION SIDE MANIFOLDS FOR 3 PUMPS INOX304

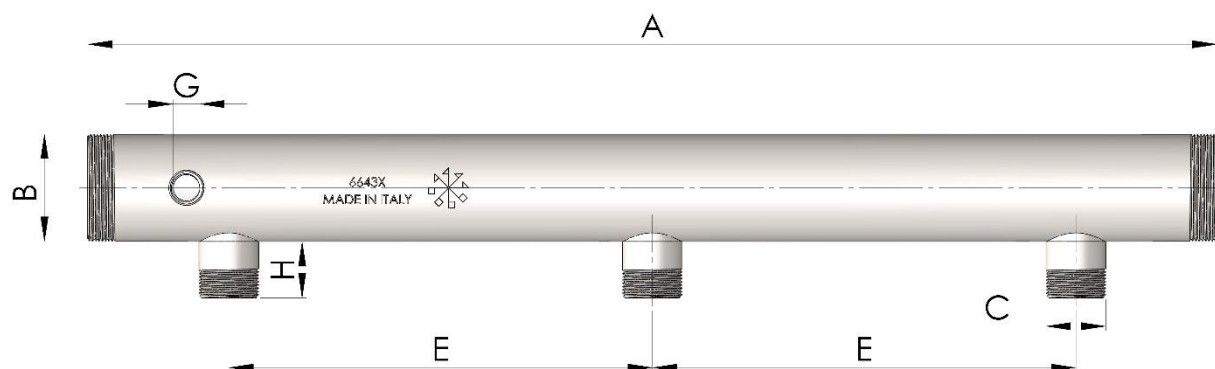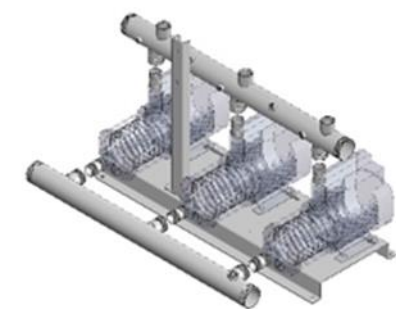



code	A (mm)	B ( $\varnothing$ )	C (G)	E (mm)	G (G)	H (mm)	Weight (kg)
<b>6642X</b>	800	2"	1"	300	1/2"	40	3.50
<b>6640X</b>	800	2"	1" 1/4	300	1/2"	40	3.60
<b>6643X</b>	800	2" 1/2	1" 1/4	300	1/2"	40	4.50
<b>6641X</b>	800	2" 1/2	1" 1/2	300	1/2"	60	4.70
<b>6644X</b>	800	3"	2"	300	1/2"	60	5.90
<b>6645X</b>	800	DN100	3"	300	1/2"	90	17.10

<b>A</b>	Length of manifold in mm
<b>B</b>	Dimension of main pipe, male threaded both sides.
<b>C</b>	Distance between pumps.
<b>D</b>	Pumps' connection, male threaded.
<b>E</b>	Female sleeves for instruments.

MATERIAL	Tube inox 304L
TUBE THICKNESS	3mm
THREADS	UNI EN ISO 228-1 cylindrical (DIN2999, BSPP)
SURFACE TREATMENT	Electrochemical polishing DIN 8590

The information in this catalog may be modify by the company, request confirmation at the time of the order.  
On request may be provided certificates of raw material, welding and test certification, ISO certification.

## VERTICAL MANIFOLDS FOR 2 PUMPS INOX304

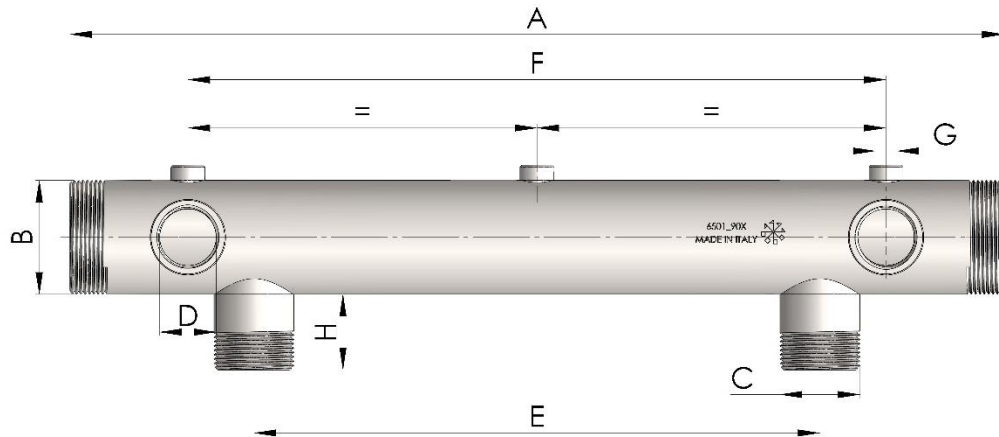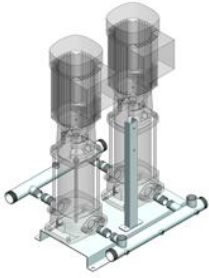



code	A (mm)	B ( $\varnothing$ )	C (G)	D (G)	E (mm)	F (mm)	G (G)	H (mm)	Weight (kg)
6500_90X	500	1"1/2	1"	1"	300	370	1/4"	60	1.90
6503_90X	500	2"	1"	1"	300	370	1/4"	60	2.30
6501_90X	500	2"	1"1/4	1"	300	370	1/4"	60	2.40
6510_90X	700	2"	1"1/4	1"	360	370	1/4"	60	3.20
6505_90X	500	2"	1"1/2	1"	300	370	1/4"	60	2.40
6511_90X	700	2"	1"1/2	1"	360	390	1/4"	60	3.20
6502_90X	500	2"1/2	1"1/4	1"	300	370	1/4"	60	2.90
6513_90X	700	2"1/2	1"1/4	1"	360	390	1/4"	60	4.00
6506_90X	500	2"1/2	1"1/2	1"	300	370	1/4"	60	3.00
6512_90X	700	3"	1"1/2	1"	360	390	1/4"	60	4.20
6504_90X	700	3"	2"	1"	360	390	1/4"	60	4.90

A	Length of manifold in mm
B	Dimension of main pipe, male threaded both sides.
C	Pumps' connection, male threaded.
D	Pressure vassels' connection, female sleeve.
E	Distance between pumps.
F	Distance between pressure vassels.
G	Female sleeves for instruments.

MATERIAL	Tube inox 304L
TUBE THICKNESS	3mm
THREADS	UNI EN ISO 228-1 cylindrical (DIN2999, BSPP)
SURFACE TREATMENT	Electrochemical polishing DIN 8590

The information in this catalog may be modify by the company, request confirmation at the time of the order.  
On request may be provided certificates of raw material, welding and test certification, ISO certification.

## VERTICAL MANIFOLDS FOR 3 PUMPS INOX304

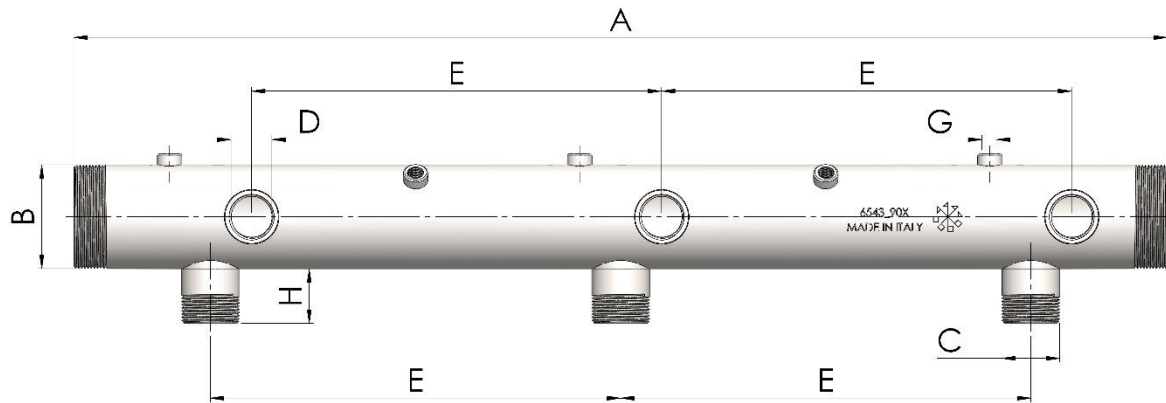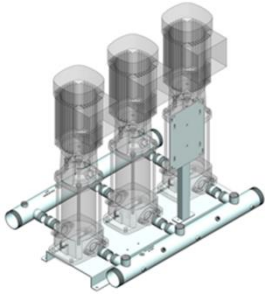


code	A (mm)	B ( $\varnothing$ )	C (G)	D (G)	E (mm)	F (mm)	G (G)	H (mm)	Weight (kg)
<b>6542_90X</b>	800	1"1/2	1"	1"	300	300	1/4"	60	3.80
<b>6540_90X</b>	800	2"	1"	1"	300	300	1/4"	60	3.90
<b>6543_90X</b>	800	2"	1"1/4	1"	300	300	1/4"	60	4.80
<b>6541_90X</b>	800	2"	1"1/4	1"	300	300	1/4"	60	5.00
<b>6544_90X</b>	800	2"	1"1/2	1"	300	300	1/4"	60	6.20

<b>A</b>	Length of manifold in mm
<b>B</b>	Dimension of main pipe, male threaded both sides.
<b>C</b>	Pumps' connection, male threaded.
<b>D</b>	Pressure vassels' connection, female sleeve.
<b>E</b>	Distance between pumps.
<b>F</b>	Distance between pressure vassels.
<b>G</b>	Female sleeves for instruments.

MATERIAL	Tube inox 304L
TUBE THICKNESS	3mm
THREADS	UNI EN ISO 228-1 cylindrical (DIN2999, BSPP)
SURFACE TREATMENT	Electrochemical polishing DIN 8590

The information in this catalog may be modify by the company, request confirmation at the time of the order.  
On request may be provided certificates of raw material, welding and test certification, ISO certification.

## BASE PLATES FOR PUMPS SYSTEMS INOX304

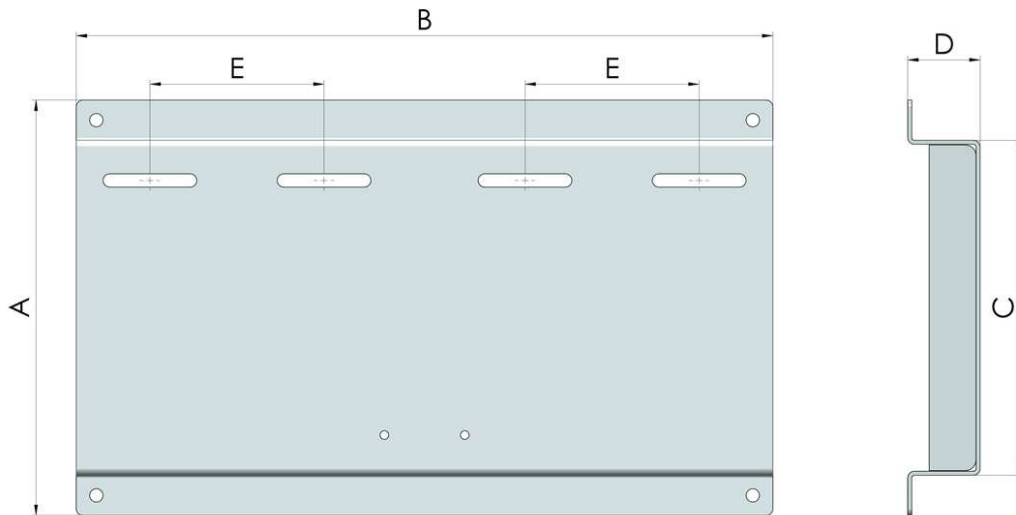


code	Description	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Carrying capacity (KG)
<b>6805X</b>	1 Pump	310	260	250	54	130	50
<b>6800X</b>	2 Pumps	310	520	250	54	130	100
<b>6802X</b>	2 Pumps	350	620	290	54	150	100
<b>6813X</b>	2 Pumps	400	720	340	54	150	100
<b>6803X</b>	3 Pumps	310	800	250	54	130	150
<b>6806X</b>	3 Pumps	400	900	340	54	150	150
<b>6804X</b>	4 Pumps	310	1080	250	54	130	200
<b>6807X</b>	4 Pumps	400	1200	340	54	150	200

<b>A</b>	Width of base plate in mm.
<b>B</b>	Length of base plate in mm.
<b>C</b>	Width of the plane to fix the pump.
<b>D</b>	Hight of the base plate.
<b>E</b>	Interaxis to fixing pumps.

MATERIAL	Inox 304
THICKNESS	3mm
SURFACE TREATMENT	Electrochemical polishing DIN 8590

The information in this catalog may be modify by the company, request confirmation at the time of the order.  
On request may be provided certificates of raw material, welding and test certification, ISO certification.

## STAND AND HOOK FOR ELECTRIC PANEL INOX304

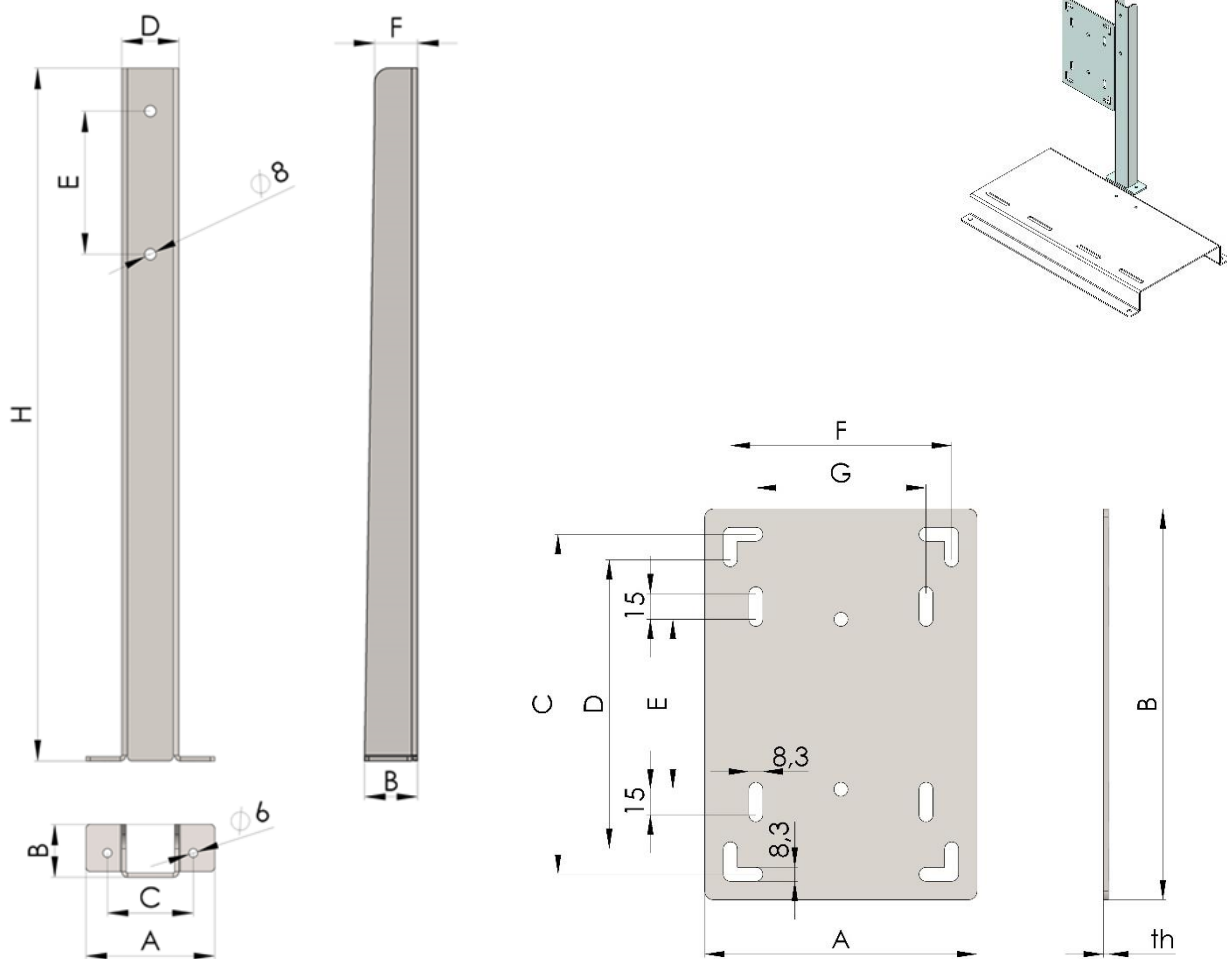


code	Description	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)
<b>6801X</b>	Stand for panel	90	37	60	40	100	30	-	484
<b>6808X</b>	Stand for panel	90	37	60	40	100	30	-	800
<b>6809X</b>	Hook for panel	160	230	200	180	100	130	110	-
<b>6810X</b>	Hook for panel	190	270	250	230	150	170	150	-
<b>6811X</b>	Hook for panel	310	370	350	320	230	260	230	-
<b>6812X</b>	4 feet antivibration	-	-	-	-	-	-	-	-

MATERIAL	Inox 304
THICKNESS	3mm
SUPERFICIAL TREATMENTS	Electrochemical polishing DIN 8590

The information in this catalog may be modify by the company, request confirmation at the time of the order.  
On request may be provided certificates of raw material, welding and test certification, ISO certification.


## FEMALE CUPS FOR MANIFOLDS INOX316

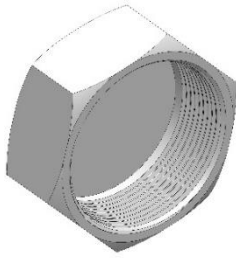

code	Description	Size
<b>6750XX</b>	Cup in INOX 316	G1"F
<b>6751XX</b>	Cup in INOX 316	G1"1/4F
<b>6752XX</b>	Cup in INOX 316	G1"1/2F
<b>6753XX</b>	Cup in INOX 316	G2"F
<b>6754XX</b>	Cup in INOX 316	G2"1/2F
<b>6755XX</b>	Cup in INOX 316	G3"F

The information in this catalog may be modify by the company, request confirmation at the time of the order.  
On request may be provided certificates of raw material, welding and test certification, ISO certification.

## NIPLES INOX304

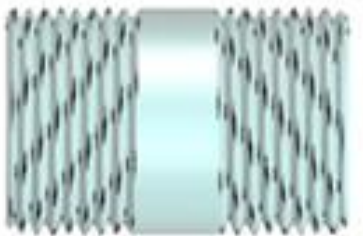

code	Description	Size	Lenght
<b>C0919X</b>	Niplo INOX 304	G1"M	50mm
<b>C0920X</b>	Niplo INOX 304	G1"1/4M	50mm
<b>C0921X</b>	Niplo INOX 304	G1"1/2M	70mm
<b>C0922X</b>	Niplo INOX 304	G2"M	70mm

The information in this catalog may be modify by the company, request confirmation at the time of the order.  
On request may be provided certificates of raw material, welding and test certification, ISO certification.



## **General sale conditions**

Order: We reserve the right to accept or not the orders received.

Transport: Ex-works, shipment of the goods under customer's responsibility.

Packaging: As above.

Payment: Against documents, if there aren't any particular conditions. For every delayed payment or every other problem we debit the charges.

Return of Goods: We accept goods back only with our authorisation.

Guarantee: The guarantee conditions are in accordance with D.Lsg. n. 24 del 02/02/2002.

Complaint: complains must be received within 5 days from the receipt of the goods.

.

.